



Spadea Y-3107 Sew Speedy Size 8 Bust 33 Waist 23 Hip 34
GASP Archives: Sewing Pattern Database @XxGASPxx

Important notice: This pattern is cut to Ready To Wear measurements, not Standard pattern Measurements. Shorter than regulation length.

PDF file 1 of 2:
- One page instruction sheet printed both sides

PDF file 2 of 2:
- Eight unprinted pieces

PDF file is left open for personal use with Adobe Illustrator/InkScape/Canva-Affinity or similar. Format is A0 but may print as A4 with Adobe tiling/poster instructions. Scans are of the original pattern, not to be resold or offered on any other website, pattern database or social platform.

You are allowed to feature the pattern envelope front and back in online posts.

Y-3107

Spadea Designer Pattern

SIZE 8



Y-3107

Sew Speedy

SHORTER THAN REGULATION LENGTH

If you need a dress that looks crisply tailored, but you want to make it quickly, this Sew Speedy meets your demands. It's easy to make and quite dashing. The deep waist front meets a high waist seam which swoops around to the back and down to a point. A four panel, A-shaped skirt lends a graceful line and freedom of movement. Top-stitching announces points of interest in the bodice and gives the dress a beautifully finished look.

IMPORTANT NOTICE: This pattern is cut to Ready-to-Wear Measurements, not Standard Pattern Measurements.

READY-TO-WEAR BODY MEASUREMENTS:

MISSES Sizes	8	10	12	14	16	
Bust	33	34	35	36½	38	inches
Waist	23	24	25	26½	28	inches
Hip (5" below waist)	34	35	36	37½	39	inches
Length from nape of neck to waist	16¼	16½	16¾	17	17¼	inches
*Finished length of dress (hem allowance 1 7/8")	36	36½	37	37½	38	inches
Width at lower edge	55	56	57	58½	60	inches

*This dress is 4" shorter than regulation length.

DRESS

36" Fabric	2 3/8	2 3/8	2 1/2	2 1/2	2 1/2	yards
42" Fabric	2 1/8	2 1/4	2 1/4	2 3/8	2 3/8	yards
54" Fabric	1 1/2	1 1/2	1 5/8	1 5/8	1 5/8	yards

LINING


36" Fabric	2 1/8	2 1/8	2 1/8	2 1/4	2 3/8	yards
42" Fabric	2	2	2	2 1/8	2 1/8	yards

SEWING NOTIONS: 22" Neck Type Zipper, Hook & Eye, Seam Binding.

FABRIC SUGGESTIONS: Linen, Novelty Cottons, Raw Silk, Shantung, Pique, Lightweight Woolens. LINING: China Silk, Taffeta.

NOTE: Yardage requirements are for fabrics without nap, pile, or one-way design unless stated otherwise; additional yardage is suggested for fabrics not pre-shrunk, napped fabrics, or for matching plaids or stripes.

IDENTIFICATION CHART

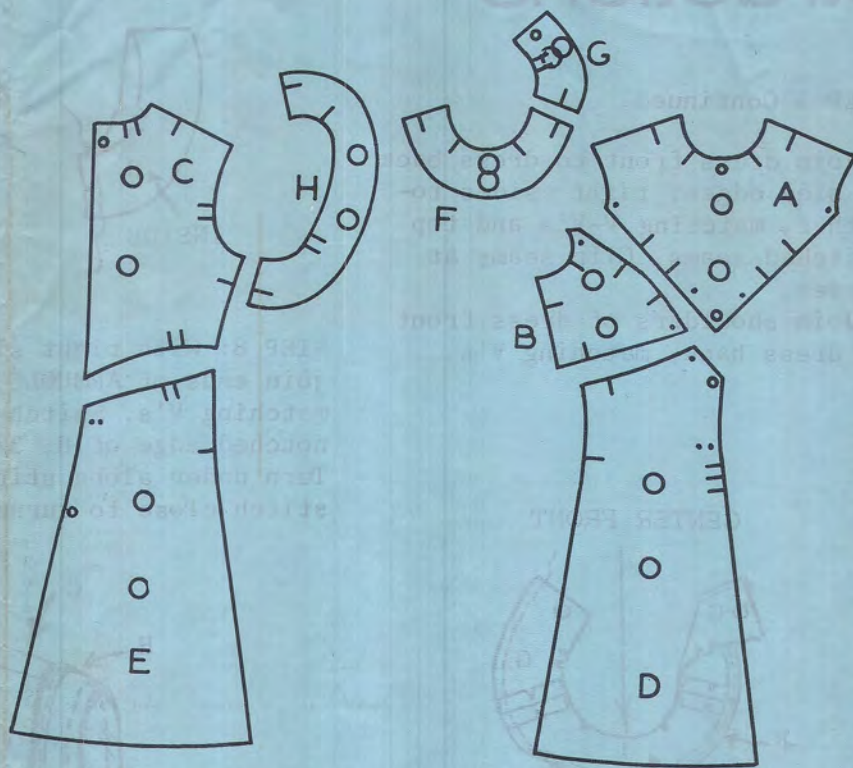


8 PIECES

- A. WAIST FRONT (CUT 1 & 1 OF LINING)
- B. WAIST SIDE FRONT (CUT 2 & 2 OF LINING)
- C. WAIST BACK (CUT 2 & 2 OF LINING)
- D. SKIRT FRONT (CUT 2 & 2 OF LINING)
- E. SKIRT BACK (CUT 2 & 2 OF LINING)
- F. NECK FRONT FACING (CUT 1)
- G. NECK BACK FACING (CUT 2)
- H. ARMHOLE FACING (CUT 2)

DRESSMAKING GUIDE

LENGTHEN OR SHORTEN HERE

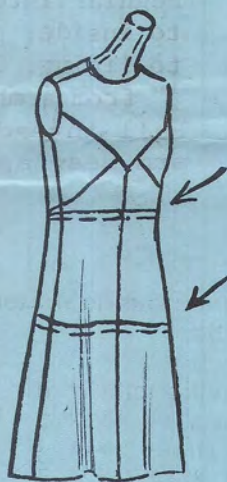


BEFORE CUTTING GARMENT:

Check all pattern pieces. Sponge woolens and washable materials.

Circle cutting layout for style, size and width of material. Place all pattern pieces in same direction for fabrics with nap or one-way design. Match lines at seams when cutting plaids and striped materials.

1. Pin all pattern pieces to material exactly as illustrated on cutting chart, indicating double fold and single layouts. Reversed pattern pieces are shown with broken lines in cutting diagram.

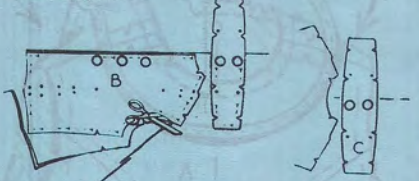

PATTERN ADJUSTMENT:

Pin pattern pieces together, taking up full seam allowance. Fit for any alterations. If necessary, lengthen or shorten pattern as illustrated.

TO SHORTEN—Pin pleat across pattern.

TO LENGTHEN—Cut across pattern, pin it to strip of paper, add needed length.

PATTERN MARKINGS

NOTCHES

Join seams.

3 LARGE

Indicates the side of the tissue that should be placed on the fold of fabric.

LARGE


Lengthwise thread of fabric; or crosswise if shown on cutting layouts.

MEDIUM

Special detailed instructions.

SMALL

Special detailed instructions.

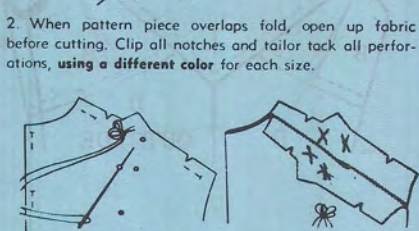



3. TAILOR TACK—Make two stitches, with long double thread, through both layers of fabric, forming a loop as shown. When all tacks are made, separate fabric slightly and snip threads as illustrated. 3/8" is provided on all seam edges, unless otherwise instructed.

FIT garment after all basting is completed. PRESS all seams after stitching. PRESS materials on wrong sides. 4. Use pinking shears only after seaming.

CUTTING LAYOUTS FOR FABRICS WITHOUT NAP, PILE OR ONE-WAY DESIGN, UNLESS STATED OTHERWISE

IMPORTANT: Place all pattern pieces on fabric according to layout before cutting. FOLLOW CUTTING LAYOUTS for placing pattern pieces on lengthwise or crosswise grain of fabric.


DRESS

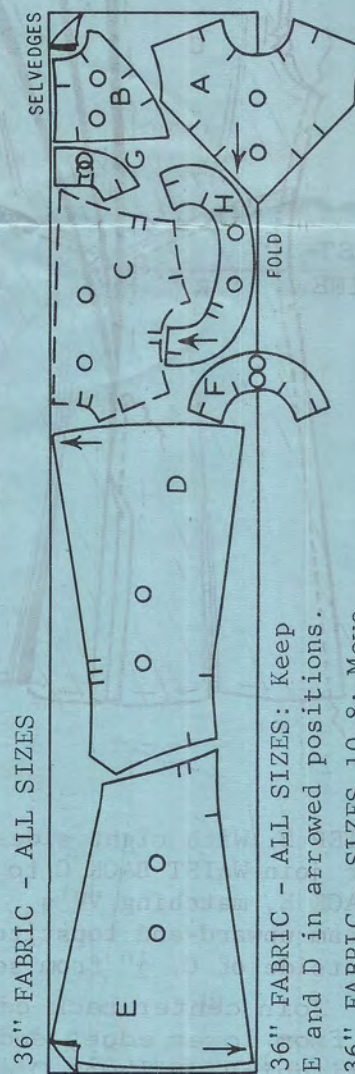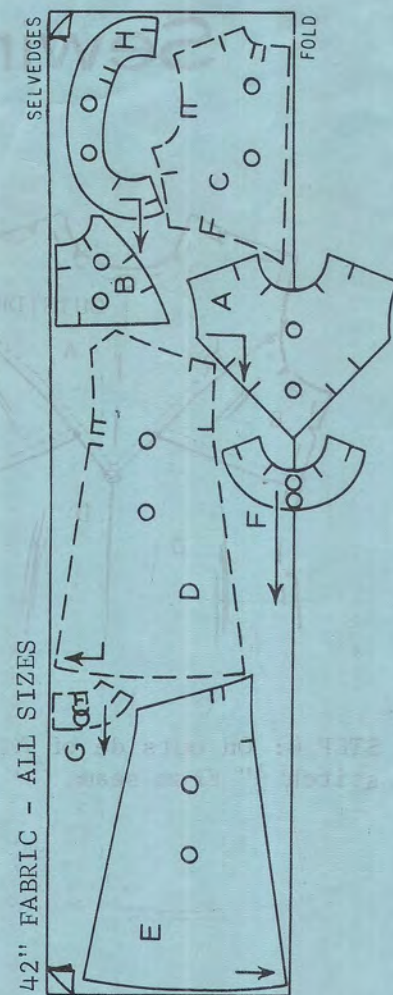


36" FABRIC - ALL SIZES: Keep E and D in arrowed positions.

36" FABRIC - SIZES 10-8: Move H and A in direction arrowed.


42" FABRIC - SIZES 14-12-10-8: Keep E and D in arrowed positions and move G, F, A and H in direction indicated.

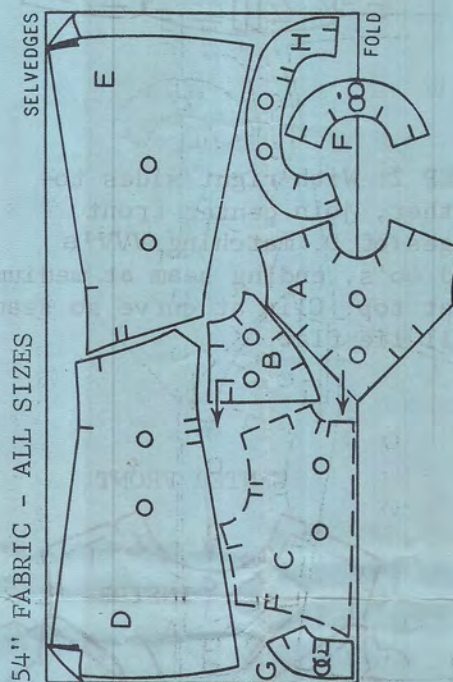

54" FABRIC - SIZES 14-12-10-8: Move B and A in direction arrowed.

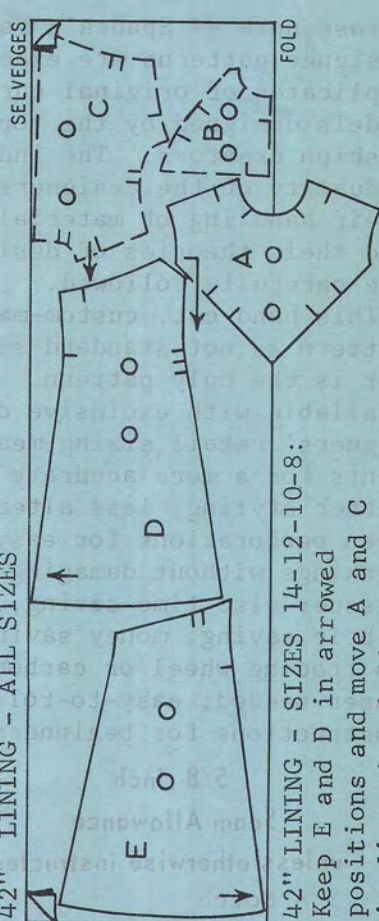

LINING

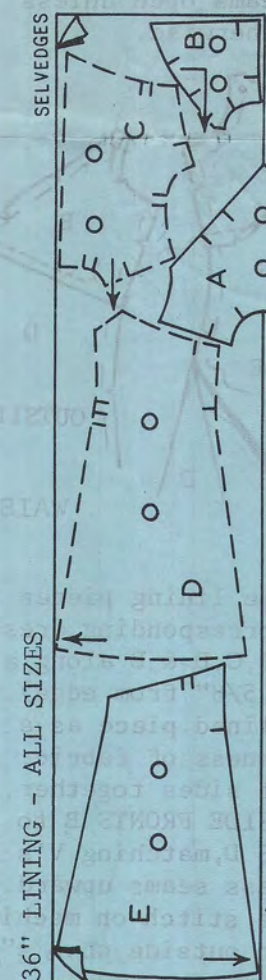

36" LINING - SIZES 14-12-10-8: Keep E and D in arrowed positions and move C and B in direction indicated.

Please note -- Spadea's famous designer patterns are exact duplicates of original current models designed by the top fashion creators. The individuality of the designers, their handling of material, and their theories of design are carefully followed.

This hand-cut, custom-made pattern is not standard sized, but is the only pattern available with exclusive designers' retail sizing measurements for a more accurate fit, better styling, less altering. Open perforations for easy markings without damaging tissue; also time saving, fabric saving, money saving; no tracing wheel or carbon paper needed; easy-to-follow instructions for beginners.

5/8 Inch

Seam Allowance

unless otherwise instructed

V = Notch

o = Small Perforation

O = Medium Perforation

Important: When instructed to end seam at a specific point, backstitch seam end to reinforce.

With a basting thread mark center fronts on pieces A and F.

Press all seams open unless specified otherwise.





STEP 1: Baste lining pieces to inside of corresponding dress sections A, B, C, D & E along all seam lines (5/8" from edge). Treat each lined piece as a single thickness of fabric.

With right sides together, join WAIST SIDE FRONTS B to SKIRT FRONTS D, matching V's and o's. Press seams upward. Using a fine stitch on machine, topstitch on outside of B, 1/2" from seam.

STEP 3: With right sides together, join WAIST FRONT A to B and D at one edge, stitching from armhole edge to O's at center front, matching V-V's and o's, easing B slightly between V-V's.

Similarly, join opposite edge of A to B and D. Snip across lower edge of seam on A, just below point and press seams upward.

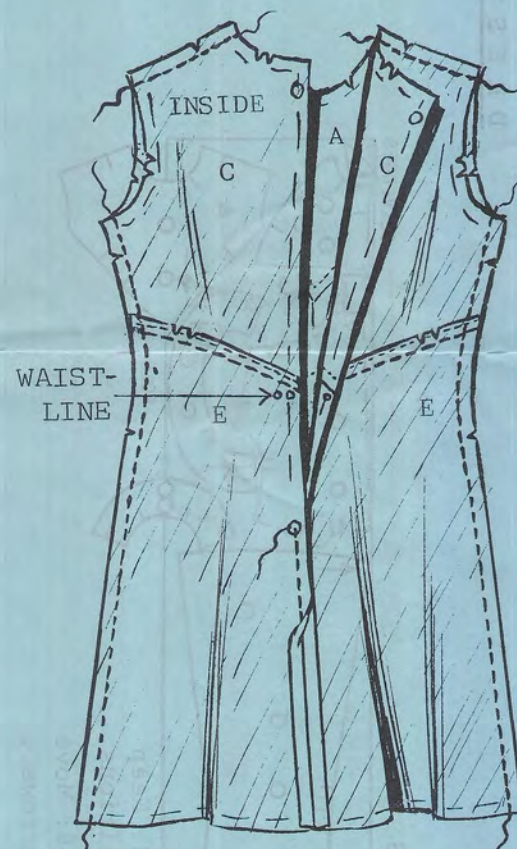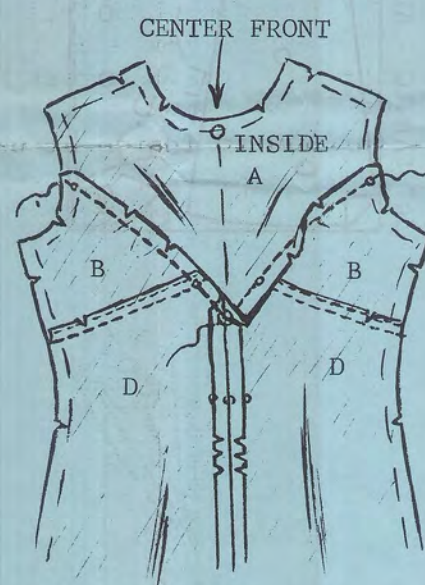

STEP 5: With right sides together join WAIST BACK C to SKIRT BACK E, matching V's. Press seam upward and topstitch on outside of C, 1/2" from seam.


Join center back edges of E from lower edge, ending stitching at lower O's.

Sewing Instructions

STEP 5 Continued.


Join dress front to dress back at side edges, right sides together, matching V-V's and top stitched seams. Clip seams at curves.

Join shoulders of dress front to dress back, matching V's.

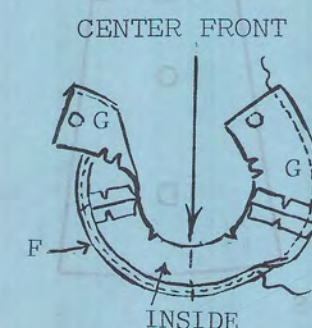


STEP 4: On outside of A, topstitch 1/2" from seam.


STEP 6: With right sides together join NECK BACK FACINGS G to NECK FRONT FACING F, matching V's. Stitch along unnotched curved edge 3/8" from edge. Turn under on stitching line and stitch again close to turned edge.

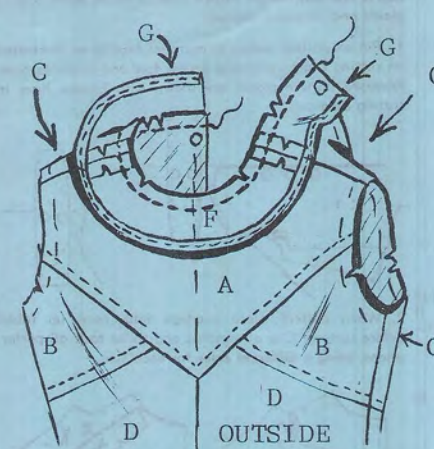


STEP 7: With right sides together join neck facing to neck edge of dress, matching V's, VV's and shoulder seams. Trim seam and clip at regular intervals. Turn facing to inside and press finished neck edge.

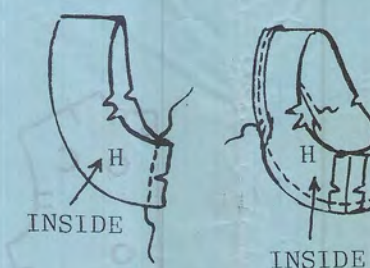

STEP 8: With right sides together, join ends of ARMHOLE FACING H, matching V's. Stitch along unnotched edge of H, 3/8" from edge. Turn under along stitching line and stitch close to turned edge.

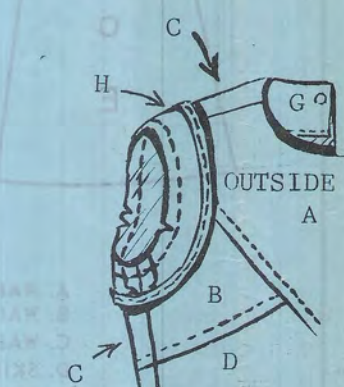


STEP 9: With right sides together, join H to dress armhole edge, matching V's, VV's and underarm seams. Trim seam, clipping at regular intervals. Turn facing to inside, press, and slipstitch to lining. On outside, topstitch 1/2" from armhole edge. Pull threads to inside at underarm seam and knot.

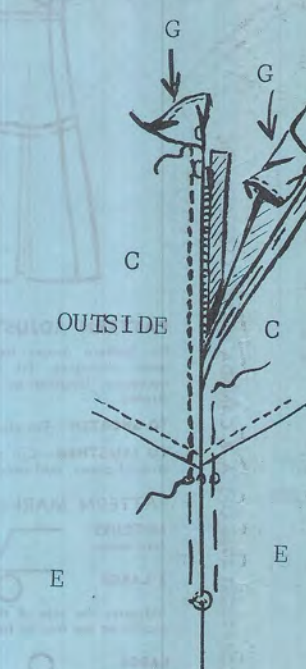


STEP 10: Turn under and baste 5/8" seam allowance on back opening edges, keeping neck facing free.

STEP 10 Continued.

With zipper closed and pull-tab at upper O, pin basted edges over zipper so that they meet at center. Baste, then sew by hand 1/4" from each side of center and across lower end, taking small, even backstitches.

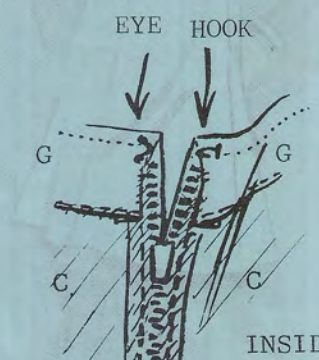

STEP 11: Turn in raw ends of back neck facing and slipstitch to zipper tape. Slipstitch curved edge of facing to lining, matching shoulder seams. On outside, topstitch 1/2" from neck edge. Sew a hook and eye inside neck edge above zipper.

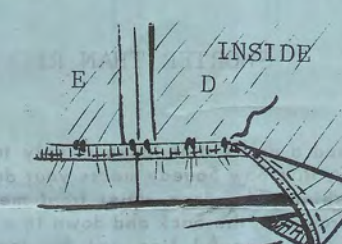

STEP 12: Try on dress, mark correct length and adjust, allowing 1 7/8" for hem. Stitch seam binding 3/8" over raw edge on outside. Turn up hem and slipstitch to lining, easing slightly.

SEAM BINDING

Send for:
THE SPADEA SEWING BOOK

Tips From World Famous Designers

It's a must for novices and accomplished sewers alike.

50¢

Spadea Fashions, Inc.
110 Fifth Avenue
New York, N.Y. 10011

Printed in U.S.A.