


VOGUE PATTERN BOOK FREE BLOUSE PATTERN


OCTOBER-NOVEMBER—1934 ISSUE

© Vogue, Printed in U. S. A.

BACK

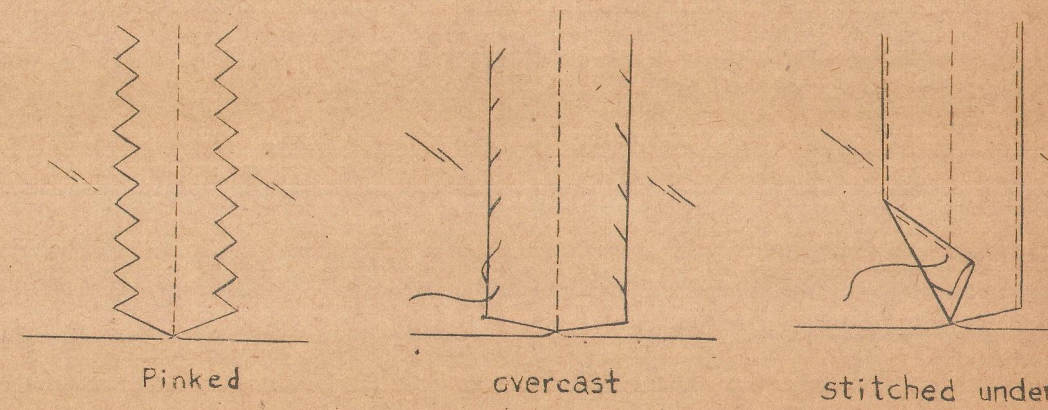

Pink or overcast edges of seams and press open. When material frays easily stitch under the raw edges before pressing open.

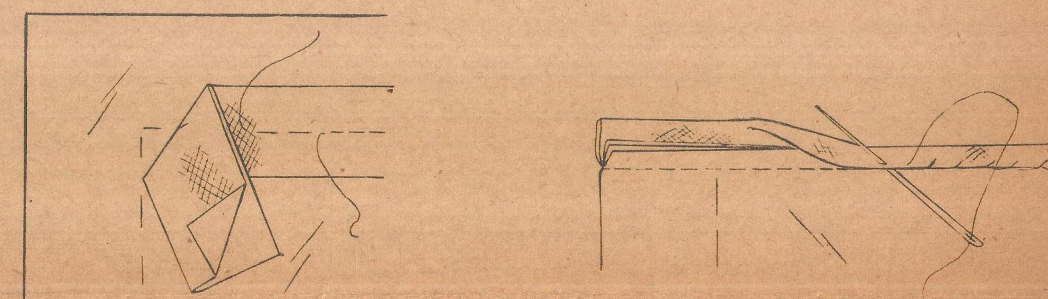


To bind: Cut bias strips 1" wide. Piece on straight grain of material. Press. Fold double. Baste raw edges of binding to right side along STITCHING LINE, taking up scant 1/4" seam on binding. Stitch.

Trim seam. Roll binding over seam and hem folded edge along stitching.



WAISTLINE

FRONT

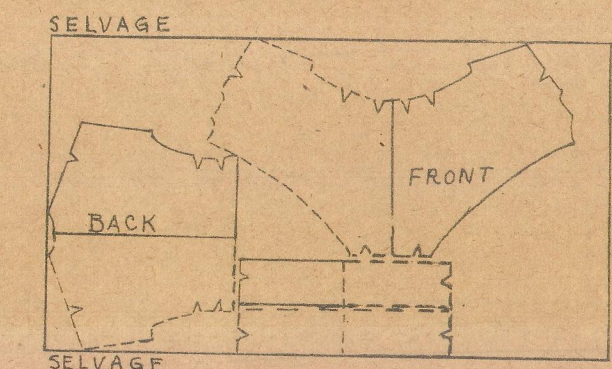

35" or 39" MATERIAL


Material Required

35" Material 1-3/4 yards
39" " 1-1/2 "

Suitable Materials


Taffeta
Linen
Handkerchief linen
Silk crepe
Satin
Metal fabrics

Cut out pattern following CUTTING LINES. Press out any wrinkles in material before cutting it. Place pattern on material as illustrated on cutting diagram, keeping STRAIGHT OF GOODS parallel to the selvage. Pin carefully along STITCHING LINES, pleat lines and centers. Pin corners accurately. Keep pins close enough to retain exact shapes of lines. Cut. Cut notches. Mark with tailors' chalk along pins. Remove pattern and run thread lines along chalk marks also along center back.

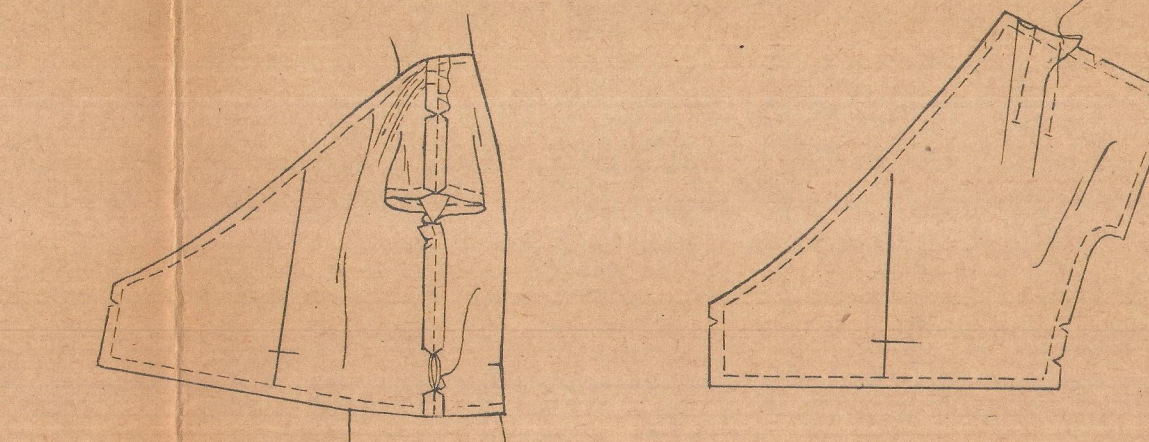


Seam BACK to FRONT at shoulders (V) matched stitching on STITCHING LINES; ease BACK. Seam sides leaving right side open between (V-V). Hem edges of opening.

Make 2 pleats at shoulder on FRONT by bringing PLEAT line to MEET line and stitching together inside. Press toward neck.

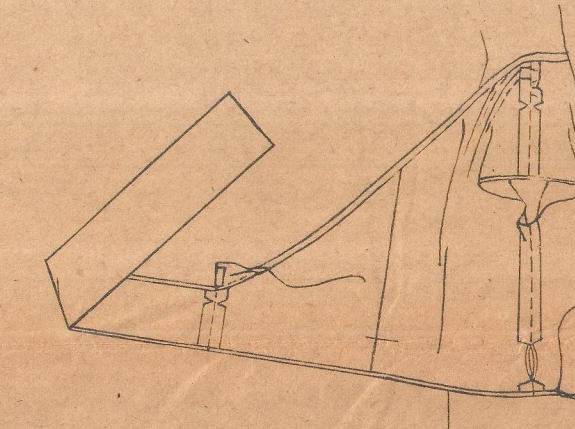


Roll-hem or bind all edges finely. Or finish neck and surplice fronts with a rather narrow bias facing and hem lower edges, SASHES and sleeves. Hold in surplice front edge in stitching on bias facing. Press facing to inside, turn under raw edge and hem flat to blouse catching up only a thread or two at a stitch and not drawing up thread tightly, to prevent stitches from showing when finished. Bias must not draw - it must be put on rather loosely. The stitching should hold in the neck edge.

WAISTLINE
CENTER FRONT

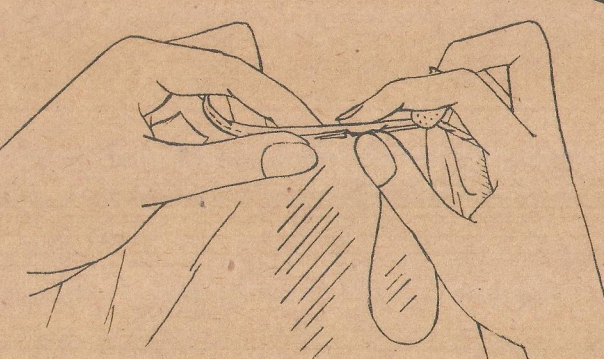

Machine stitch scant 1/4" outside STITCHING LINE. Trim edge 1/8" from stitching. To roll-hem: Grasp edge between thumb and fore-finger, and roll edge toward you and under. Moisten fingers, if necessary. Hem invisibly using fine needle and thread which matches exactly. Keep stitches about 1/8" apart and draw up thread tightly.

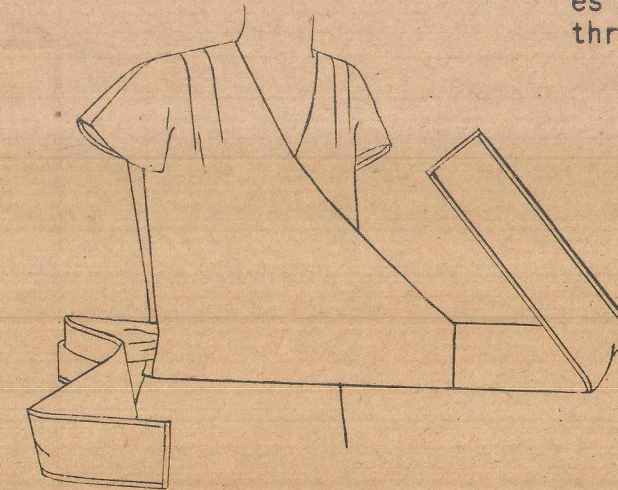

Slip SASH from left front through opening at right side seam and knot with end from right front in 1 loop and 2 ends.

MEETS

PLEAT

MEETS

PLEAT

SASH

Seam a SASH to each FRONT (V) matched.

CUT TWO

FOLD ON LAY

